




# ARTICON

## "WRAPAROUND series"

Uff. Tecnico Qualità

Series	Cod.	*Dimensions (internal averages)	*Widht ( L )	*Height ( A )	Sec. (mm <sup>2</sup> )	1 pack. (m)	metres.x pallet	pallet packages
ART	CON65A	65x50 mm	65	50	2530	24	480	20
ART	CON70A	70x55 mm	70	55	3056	20	400	20
ART	CON80A	80x60 mm	80	60	4.018	16	320	20
ART	CON90A	90x65 mm	90	65	4.830	16	320	20
ART	CON125A	125x75 mm	125	75	8.317	8	160	20

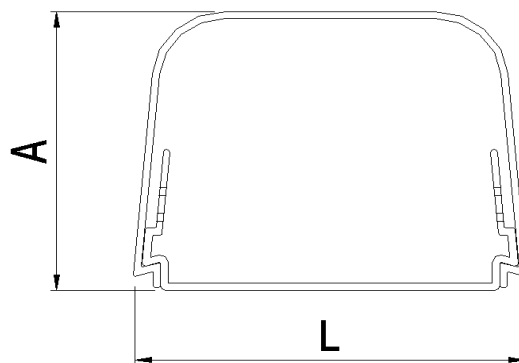

### Data

RAW MATERIAL:	PVC UV STABILIZED
Self extinguishing class:	self extinguishing class 1(UL 94 V0)
Temperature (CEI EN 50085-1):	Min temperature of transport -25C°/-5 °C Min. use temp, + 60 °C Max use temp
Conformity (Norms) :	2014/35/UE (Directive L.V.D)
	2015/863/UE (Directive Rohs)
Grade of protection :	IP40
Impact resistance:	5J
Standard Color :	White (gray base with complete disappearance)
Colors on request:	=
Standard Length:	2 m,complete with cover
Primary Application:	Conditioning Sector

### Tabella Info Tecniche Canali

Data	Modifica	Famiglia	<b>ARTICON</b> <b>WRAPAROUND series</b>	
05/07/2019	aggiornamento	ARTICON		

CANALPLAST® S.p.A. via Tolstói 65 - 20812 LIMBIATE (MB) - ITALY

pag.  
1/1

MC

[www.canalplast.it](http://www.canalplast.it)

documento proprietà Canalplast spa